

Perfect Solution for Mobile Surveillance System

The Mobile DVR



- Up to 8 Channel Video and Audio Recording with power connections
- Delayed Record Off & Shutdown Control: Various timer settings
- Multiple Levels of Security: Dual Locking System, Password Protection, Video Encryption
- Advanced H.264 Video Codec
- Compact, Lightweight, and Quiet Design: Single DIN 970 g with no fan
- Easy to Install and Maintain: Simple click connection system
- Multiple Data Recording: GPS, G-Sensor, Car Signal, RPM, Speed, and Triggers

- Various Trigger Inputs: 7 Alarm Inputs, 8 Motion Detection, Emergency Panic Button
- 2 Outputs for dual-monitoring
- Privacy Zone Block Out Function
- Innovative Analysis Software: Search, playback, analyze, & save videos
- Smart ECO-Driving System
- Stable and Large Storage Capacity: Up to 1 TB HDD or SSD storage
- Reliable Tracking Feature using Google Map
- Automatic Self Check Up



Samarth
The Ultimate Solution in Security

SAMARTH SECURITY SYSTEMS INDIA PVT. LTD.


Plot No. A - 120, MIDC, Kopar Khairne, TTC Industrial Area, Thane - Belapur Road, Navi Mumbai - 400 705, India.

Tel.: +91 - 22 - 2762 2754/59 | Fax: +91 - 22 - 2762 2745 | Email: sales@samarthsec.com | Web : www.samarthsec.com


The Most Advance Analysis Software

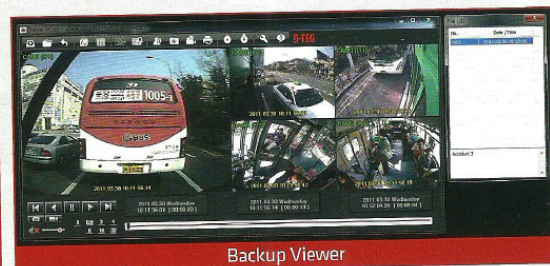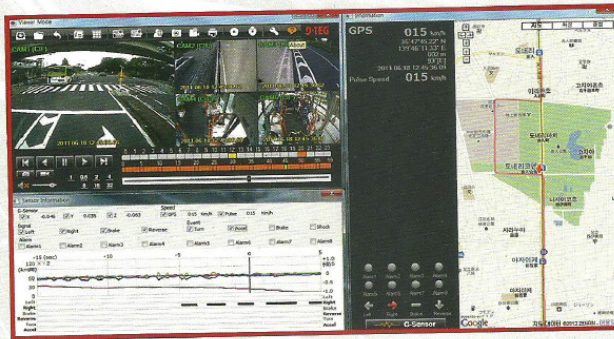

Backup Viewer




GPS & Car Signal Indicator




G-Sensor & Car Signal Graph




Various Layouts and Easy to Use Control Buttons



Privacy Zone Set

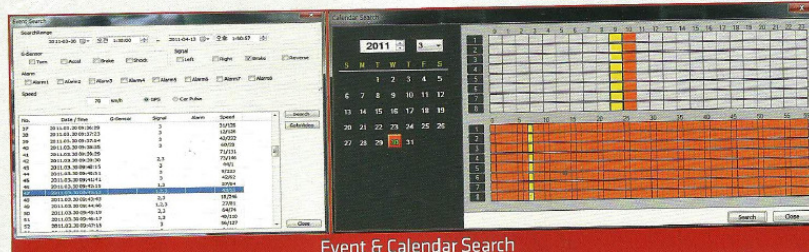

Event & Calendar Search



Convert Video to AVI / Print a Report

Cameras



STR-200H



STR-200IR



STR-220



STC-300H



STC-300HIR



STC-300HD

Specifications

Function	Detail specification	Function	Detail specification
Recording Channels	4 Video/Audio Channels (BRX2004A) 8 Video/Audio Channels (BRX2008A)	G-Sensor	Internal 3 Axis
Video/Audio Out	1 (Front) + 1 (Rear)	GPS	External GPS 1EA (Option)
Video Codec	H.264	Signal	Left, Right, Brake, Reverse, Speed Pulse, RPM
Audio Codec	G.711	Input Device	Remote Controller (IR, Option), Front Button (10EA)
Recording Resolution	NTSC : 704 x 480, 704 x 240, 352 x 240 PAL : 704 x 576, 704 x 288, 352 x 288	Recording Frame Rate	NTSC : 60(D1) / 120(Half-D1) / 240(CIF) fps PAL : 50(D1) / 100(Half-D1) / 200(CIF) fps
Alarm In / Alarm Out	7 / 2	Serial Port	RS-232C x 2
LED	POWER, REC, ALARM, LAN	Power Output	DC 12V : 1 (Front) + 1(Rear)
Main Storage	SATA Interface, Removable 2.5" HDD or SSD, Key Lock	Ambient Temp.	-10°C ~ 60°C
Sub Storage	SDHC(2GB ~ 32GB)	Ambient Humidity	0 ~ 90%
External Interface	1 USB Host	Shock Tolerance	3G (Only SSD)
LAN	10 / 100 Mbps	Power Input	DC 8 ~ 40V
Dimensions	10IN : 178mm(W) x 50mm(H), 170mm(D)	Weight	970g (System) + 110g (Removable Pack) : 1.08Kg

Samarth
The Ultimate Solution in Security

SAMARTH SECURITY SYSTEMS INDIA PVT. LTD.

Plot No. A - 120, MIDC, Kopar Khairne, TTC Industrial Area, Thane - Belapur Road, Navi Mumbai - 400 705, India.

Tel.: +91 - 22 - 2762 2754/59 | Fax: +91 - 22 - 2762 2745 | Email: sales@samarthsec.com | Web : www.samarthsec.com